A1 Series | Surface
ZUCO Corner
(A1-ZUCO-CRN)

TYPE

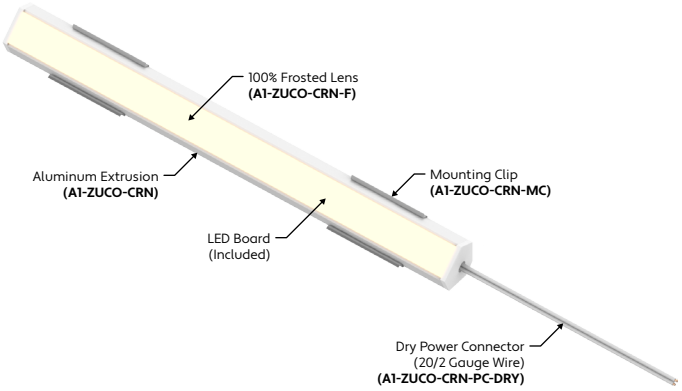

END VIEW / DIMENSIONS



LENS / OPTICS APPEARANCE

Clear Lens **(CL)**
Visible Diode Image
0% Loss Factor

50% Semi-Frosted Lens **(SF)**
Slight Diode Image
12.5% Loss Factor

100% Frosted Lens **(F)**
No Diode Image: Line of Light
25% Loss Factor

Asymmetric Lens **(ASML, ASMR)**
Slight Diode Image
18% Loss Factor

Optic Lens **(15D, 30D, 45D, 60D)**
Slight Diode Image
18% Loss Factor

GENERAL FEATURES

Applications	Accent, Cove, Under Cabinet Lighting
Lens	Clear, 50% Semi-Frosted, or 100% Frosted
Optics & Asymmetric	15°, 30°, 45°, 60°, 120°, or Asymmetric Optics
Length	Built to Order (+/- 1.8" Tolerance)
Construction	Aluminum Extrusion
Weight	0.44 lbs per foot
Mounting	Mounting Clips (Sold Separately)
Listing	Dry, Wet, or IP67 Location UL1598, CSA C22.2#250.0 UL8750, CSA250 UL2108, 67.1.9, 60.4, CSA C22.2 #9
Driver	Remote
Closet Rating	Up to 3.6 Watts per Foot Maximum
Temperature Ratings	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
Installation Link	**Link to Installation Instructions** ›

ELECTRICAL

Dimming	0-10V, Forward / Reverse Phase, Lutron, DMX, DALI
Maximum Run (Class 2 Applications)	36' **(1.5W, 2W)**, 28' **(3W)**, 21' **(4W)**, 17' **(5W)**, 14' **(6W)**, 10' **(8W)**, 7' **(12W)**
Luminaire Voltage	120V - 277V **(UNV)**

SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS

Series	Lens / Optics	Finish	CCT LED	Watts per Foot	Dimming	Listing	Luminaire Voltage	Luminaire Length
A1-ZUCO-CRN							**UNV**	
ZUCO Corner **(A1-ZUCO-CRN)**	Clear Lens **(CL)**	Natural Silver*2 **(NA)**	2400K **(24K)**	1.5 Watts: 190 Lumens / ft*3 **(1.5W)**	0-10V: 100% - 1% **(10V)**	Indoor **(DRY)**	120V - 277V **(UNV)**	Specify Length in Feet & Inches **Example:** 7'8"
	50% Semi-Frosted Lens **(SF)**		2700K **(27K)**	2 Watts: 254 Lumens / ft*3 **(2W)**	Phase Dimming: Forward Phase / Reverse Phase **(PH)**			
		Silver **(SR)**	3000K **(30K)**	3 Watts: 381 Lumens / ft*3 **(3W)**		Outdoor **(DAMP)**		
	100% Frosted Lens **(F)**	White **(WH)**	3500K **(35K)**	4 Watts: 508 Lumens / ft*3 **(4W)**	Hi-Lume 1% 3 Wire*4 **(L3DA)**			
	Asymmetric Lens Left **(ASML)**	Satin **(SA)**	4000K **(40K)**	5 Watts: 635 Lumens / ft*3 **(5W)**	Hi-Lume Premier 0.1% JA8*5 **(L3D0)**	Outdoor*8 **(WET)**		
		Black **(BK)**	4500K **(45K)**	6 Watts: 762 Lumens / ft*3 **(6W)**	DMX-512*6 **(DMX)**			
	Asymmetric Lens Right*1 **(ASMR)**		5000K **(50K)**	8 Watts: 1016 Lumens / ft*3 **(8W)**	DALI*7 **(DALI)**	Outdoor IP67*8 **(IP67)**		
			5700K **(57K)**	12 Watts: 1524 Lumens / ft*3 **(12W)**	JA8 0-10V **(JA8-10V)**			
	15° Optics **(15D)**		Red **(R)**		JA8 Phase Dimming **(JA8-PH)**			
	30° Optics **(30D)**		Green **(G)**		**Leave Blank for Non-Dimming**			
	45° Optics **(45D)**		Blue **(B)**					
	60° Optics **(60D)**		Amber **(A)**					

Note: See page 2 for ordering notes & restrictions.

620 South Richfield Rd, Placentia, CA 92870

aluz.lighting info@aluz.lighting 866.ALUZ.LTG | 714.535.7900

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

Specification Submittal

7 / 28 / 2025 / Rev 20

ALUZ

A1 Series | Surface
ZUCO Corner
(A1-ZUCO-CRN)

TYPE

ORDERING NOTES & RESTRICTIONS

Note: Remote drivers sized based on wattage per length. **Example:** 10 feet x 8 Watts = 80 Watts. Driver will be sized based on 80 Watts.

*[1] Default Asymmetric Direction is Right **(ASMR)** if unspecified.

*[2] Default finish is Natural Silver **(NA)** if left blank.

*[3] Lumens per Foot based on 35K CCT LED with Clear Lens **(CL)**. **Example:** 127 Lumens x 1.5 Watts = 190 Lumens per Foot.

*[4] **(L3DA)** 40 watt max Hi-Lume 1% L3DA3W #L3DA4U1UKL-CV240

*[5] **(L3D0)** 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U

*[6] Default DMX address of each fixture is 001. Consult third party DMX commissioner to modify at time of installation.

*[7] DALI commissioning to be performed by a third party at time of installation. ALUZ does not provide DALI commissioning.

*[8] Wet **(WET)** and IP67 **(IP67)** rated products only available in 1.5W, 2W, 3W, 4W, and 5W.

LAMP FEATURES

Lamp Type	High Output LEDs (No Mercury)
CRI	> 95
Efficacy*	127 Lumens per Watt

Note: Efficacy is based on 35K CCT LED **(35K)** with Clear Lens **(CL)**.

LAMP SPECIFICATIONS

Lamp Number	Correlated Color Temperature / Description	Efficacy (Lumens per Watt)	L70 LED Life
24K	2400 Kelvin (Incandescent White)	127	60,000 hrs.
27K	2700 Kelvin (Warm White)	127	
30K	3000 Kelvin (Warm White)	127	
35K	3500 Kelvin (Neutral White)	127	
40K	4000 Kelvin (Neutral White)	127	
45K	4500 Kelvin (Neutral White)	127	
50K	5000 Kelvin (Cool White)	137	
57K	5700 Kelvin (Cool White)	137	
R	Red (621nm)	70	40,000 hrs.
G	Green (525nm)	139	
B	Blue (470nm)	40	
A	Amber (590nm)	128	

Note: The specifications Standard Output **(SO)**, Mid Output **(MO)**, and High Output **(HO)** have been replaced by a single output equivalent to High Output **(HO)**.
To calculate Lumens per Foot, multiply Efficacy by Watts per Foot.
Example: 127 Lumens per Watt x 1.5 Watts per Foot = 190 Lumens per Foot.

OPTICS ORIENTATION

Asymmetric Lens Right **(ASMR)**



Asymmetric Lens Left **(ASML)**

Note: Refer to the above diagrams to understand optics orientation in relation to the power feed.

SPECTRAL POWER DISTRIBUTION
AMBER LED (590nm) TURTLE FRIENDLY

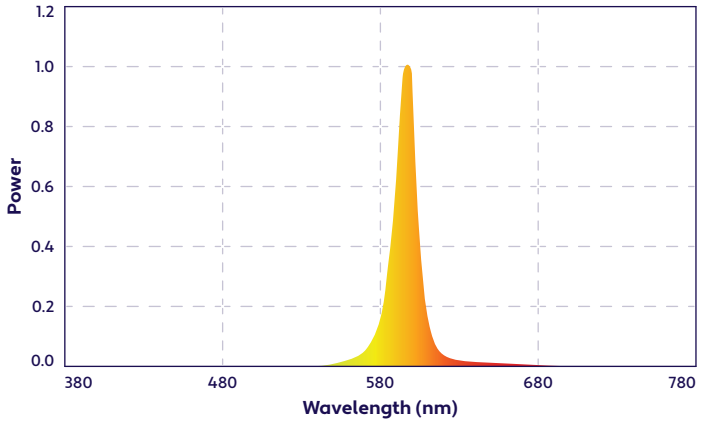

BEAM ANGLES



120° x 120° Beam
Clear Lens **(CL)**
50% Semi-Frosted Lens **(SF)**
100% Frosted Lens **(F)**



45° x 60° Beam
Asymmetric Lens Left
(ASML)



45° x 60° Beam
Asymmetric Lens Right
(ASMR)



15° x 60° Beam
Optic Lens
(15D)



30° x 60° Beam
Optic Lens
(30D)



45° x 60° Beam
Optic Lens
(45D)



60° x 60° Beam
Optic Lens
(60D)

620 South Richfield Rd, Placentia, CA 92870

aluz.lighting info@aluz.lighting 866.ALUZ.LTG | 714.535.7900

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

DRIVERS

Dimming Selection	Product Code	Link to Specification Sheet / URL
0-10V: 100% - 1%	**(10V)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure.pdf
Phase Dimming: Forward Phase / Reverse Phase	**(PH)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure.pdf
Hi-Lume 1% 3 Wire	**(L3DA)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure-Lutron.pdf
Hi-Lume Premier 0.1% JA8	**(L3D0)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure-Lutron.pdf
DMX-512	**(DMX)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure-RDM.pdf
DALI	**(DALI)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure-RDM.pdf
JA8 0-10V	**(JA8-10V)**	https://aluz.lighting/assets/PDFs/DRV/DRIVERS-Brochure.pdf

MOUNTING OPTIONS (Sold Separately)

Note: Mounting clips are only available in Natural Silver Finish, unless otherwise specified.

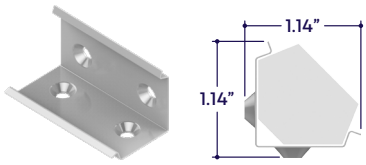

Mounting Clip
(A1-ZUCO-CRN-MC)

Part #	Qty.
A1-ZUCO-CRN-MC	

Note: Use 1 mounting clip per 2', rounded up.
Click on image to see cut sheet for details.

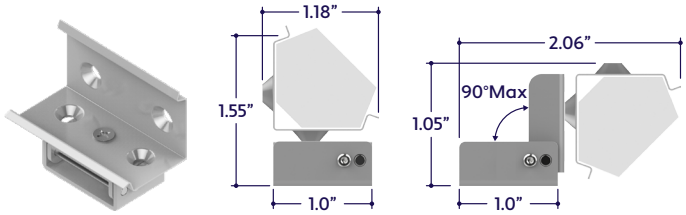

Adjustable Mounting Clip
(A1-ZUCO-CRN-MC-ADJ)

Part #	Qty.
A1-ZUCO-CRN-MC-ADJ	

Note: Use 1 mounting clip per 2', rounded up.
Click on image to see cut sheet for details.

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

DRY CONNECTORS (Sold Separately)

Note: Connectors are factory assembled to each run length.

Dry Power Connector
(A1-ZUCO-CRN-PC-DRY-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZUCO-CRN-PC-DRY-	36"	
A1-ZUCO-CRN-PC-DRY-		

Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

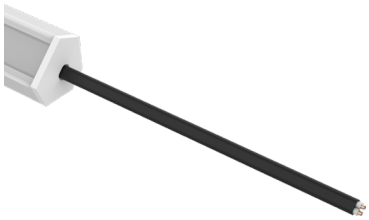

Dry Power Connector with Black Jacket
(A1-ZUCO-CRN-PC-DRY-BK-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZUCO-CRN-PC-DRY-BK-	36"	
A1-ZUCO-CRN-PC-DRY-BK-		

Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

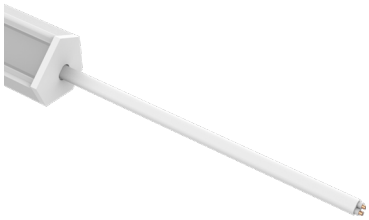

Dry Power Connector with White Jacket
(A1-ZUCO-CRN-PC-DRY-WH-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZUCO-CRN-PC-DRY-WH-	36"	
A1-ZUCO-CRN-PC-DRY-WH-		

Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

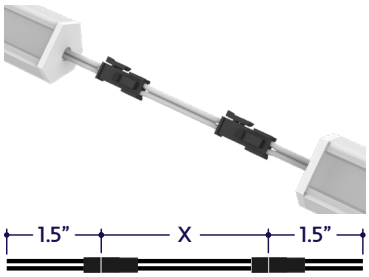

Dry Continuous Connector
(A1-ZUCO-CRN-CC-DRY-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZUCO-CRN-CC-DRY-	3"	
A1-ZUCO-CRN-CC-DRY-		

Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

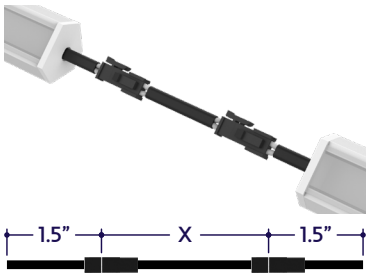

Dry Continuous Connector with Black Jacket
(A1-ZUCO-CRN-CC-DRY-BK-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZUCO-CRN-CC-DRY-BK-	3"	
A1-ZUCO-CRN-CC-DRY-BK-		

Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

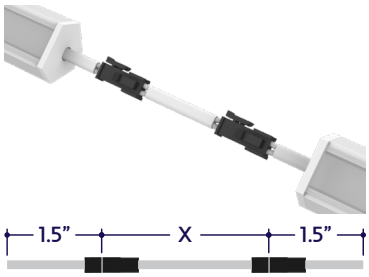

Dry Continuous Connector with White Jacket
(A1-ZUCO-CRN-CC-DRY-WH-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZUCO-CRN-CC-DRY-WH-	3"	
A1-ZUCO-CRN-CC-DRY-WH-		

Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

WET CONNECTORS (Sold Separately)

Note: Connectors are factory assembled to each run length.

Wet Power Connector
(A1-ZUCO-CRN-PC-WET-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A1-ZUCO-CRN-PC-WET-	36"	
A1-ZUCO-CRN-PC-WET-		

Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

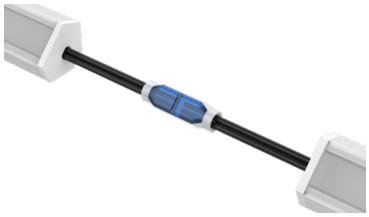

Wet Continuous Connector
(A1-ZUCO-CRN-CC-WET-X)
X = Specify Length, 3" Default

Part #	Length	Qty.
A1-ZUCO-CRN-CC-WET-	3"	
A1-ZUCO-CRN-CC-WET-		

Note: Specify Continuous Connectors to traverse a gap or obstacle. Continuous Connectors are factory assembled to specified lengths.

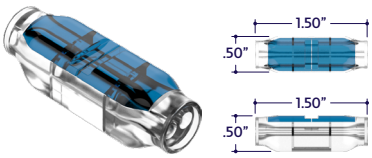

Wet Splice Connector
(A1-SC-2P-WET)

Part #	Qty.
A1-SC-2P-WET	

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

DESIGN GUIDELINES

Individual Fixture



Continuous Run (Dry Location)

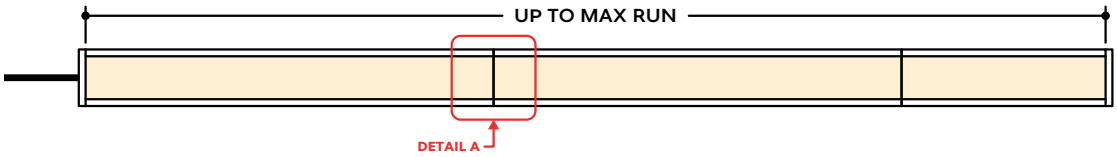

Continuous Run (Wet Location)

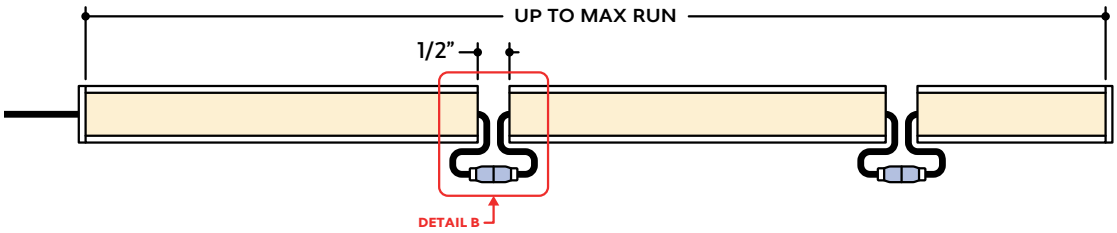

Runs with Continuous Connector (Dry Location)

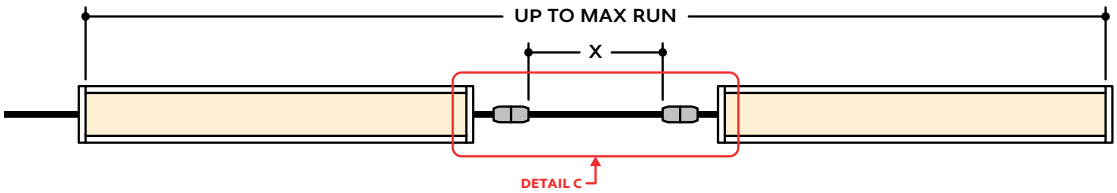

Runs with Continuous Connector (Wet Location)

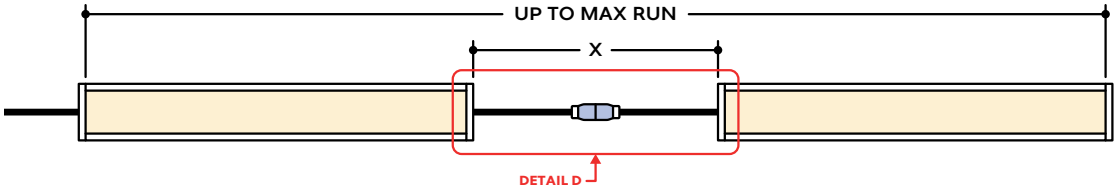

KEY

Detail A	**Continuous Connection (Dry Location):** Luminaire segments connect using pins, leaving no gaps between segments, with a mounting clip holding the two segments together. Refer to installation instructions for additional information.
Detail B	**Continuous Connection (Wet Location):** Luminaire segments are connected using a provided splice connector, with a 1/2” gap between segments.
Detail C	**Dry Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a dry location installation area.
Detail D	**Wet Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a wet location installation area.

Note: Drawings not to scale. Product may differ from examples shown.

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

CONNECTION SEQUENCE



PC = Power Connector
Start of Run

CC = Continuous Connector
Continuous Connection

EC = End Cap
End of Run

- Specifying a layout is not required to place an order.
- Configuration code applies to full length ordered and will be built per the Continuous Run models on Design Guidelines.
- Connector type subject to change based on availability and listing. Refer to Design Guidelines for details.

HOW TO SPECIFY CONFIGURATIONS

Example: 20' Straight Run

- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-DRY-UNV-20'-PC-EC



Example: 25' L-Shaped Run

- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-12'-PC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-13'-CC-EC

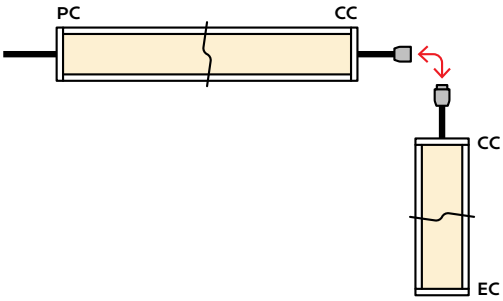

Example: 30' U-Shaped Run

- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-DRY-UNV-6'-PC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-DRY-UNV-18'-CC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-DRY-UNV-6'-CC-EC

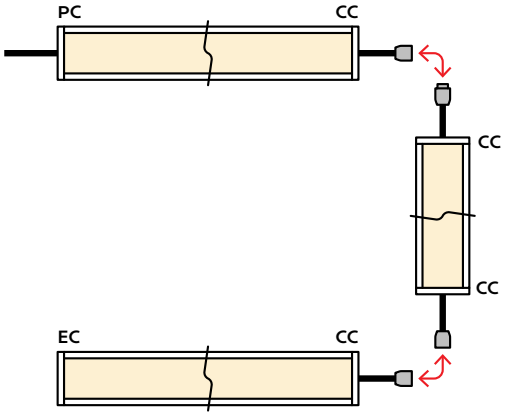

Example: 28' Rectangle Shaped Run

- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-11'-PC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-3'-CC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-11'-CC-CC
- 1x A1-ZUCO-CRN-CL-NA-35K-1.5W-10V-WET-UNV-3'-CC-EC

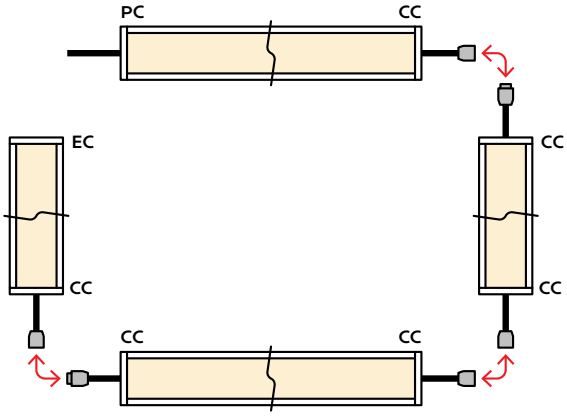

620 South Richfield Rd, Placentia, CA 92870

aluz.lighting info@aluz.lighting 866.ALUZ.LTG | 714.535.7900

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.