


GENERAL FEATURES

Applications	Mud-In, Accent, Decorative, Surface, Recessed Lighting
Lens	50% Semi-Frosted, or 100% Frosted
Viewing Angle	120°
Length	Built to Order (+/- 1/8" Tolerance)
Construction	Aluminum Extrusion
Field Cutting	Dry, Damp, and Wet Location Field Cuttable
Weight	0.46 lbs per foot
Mounting	Mud-In
Listing	Dry, Damp, or Wet Location UL2108, 67.1.9, 60.4, CSA C22.2 #9 UL8750, CSA250
Driver	Remote (Sold Separately)
Closet Rating	Up to 3.6 Watts per Foot Maximum
Temperature Ratings	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)
Installation Link	

END VIEWS / DIMENSIONS



ELECTRICAL

Dimming	0-10V, Forward / Reverse Phase, Lutron, DMX, DALI
Maximum Run (Class 1 Applications)	18' (6.5W), 21' (5.5W), 26' (4.5W), 33' (3.6W), 36' (1.5W, 2.5W)
Maximum Run (Class 2 Applications)	13' (6.5W), 15' (5.5W), 18' (4.5W), 23' (3.6W), 34' (2.5W), 36' (1.5W)
Luminaire Voltage	24VDC

SPECIFY PRODUCT CODE | CHOOSE FROM DROP DOWNS

Series	Lens	Watts per Foot	Dimming	CCT LED	Listing	Finish	Luminaire Length
A8-ZIGY-FWA							WH
ZIGY Floor Wall Arc (A8-ZIGY-FWA)	50% Semi-Frosted Lens (SF)	1.5 Watts (1.5W) 154 Lumens / ft* 2.5 Watts (2.5W) 257 Lumens / ft* 3.6 Watts (3.6W) 370 Lumens / ft* 4.5 Watts (4.5W) 463 Lumens / ft* 5.5 Watts (5.5W) 566 Lumens / ft* 6.5 Watts (6.5W) 669 Lumens / ft*	Phase Dimming: Forward / Reverse Phase (PH) 0-10V: 100% - 1% (10V) Hi-lume 1% 3 Wire* (L3DA) Hi-lume Premier 0.1% JA8* (L3D0) JA8 0-10V (JA8-10V) DMX-512* (DMX) DALI* (DALI)	2400K (24K) 2700K (27K) 3000K (30K) 3500K (35K) 4000K (40K) 4500K (45K) Red* (R)	Indoor (DRY) Outdoor (DAMP) Outdoor* (WET)	White* (WH)	Specify Length in Feet & Inches Example: 7'8"
	100% Frosted Lens: Line of Light (F)		Leave Blank for Non-Dimming	Green* (G) Blue* (B) Amber* (A)			

* Lumens per Foot based on 35K CCT LED with Clear Lens (CL). Example: 103 Lumens x 1.5 Watts = 154 Lumens per Foot.
 * (L3DA) 40 watt max Lutron Hi-Lume 1% 3 Wire #L3DA4UIUKL-CV240
 * (L3D0) 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U
 * Default DMX address of each luminaire is 001. Consult third party DMX commissioner to modify at time of installation.
 * DALI commissioning to be performed by a third party at time of installation. ALUZ does not provide DALI commissioning.
 * Red, Green, Blue, and Amber LEDs are only available in 2.5W and 5.5W.
 * Run lengths are required for Wet & IP67 Location products. Provide run lengths at time of order.
 * Default finish is White (WH) if left blank.



LAMP FEATURES

Lamp Type	LEDs
CRI	> 95
R _s	95
Efficacy*	90 Lumens per Watt

Note: Efficacy is based on 35K CCT LED (35K) with 50% Semi-Frosted Lens (SF).

LAMP SPECIFICATIONS


Lamp Number	Correlated Color Temperature / Description	Efficacy (Lumens per Watt)	L70 LED Life
24K	2400 Kelvin (Incandescent White)	90	60,000 hrs.
27K	2700 Kelvin (Warm White)	101	
30K	3000 Kelvin (Warm White)	100	
35K	3500 Kelvin (Neutral White)	103	
40K	4000 Kelvin (Neutral White)	105	
45K	4500 Kelvin (Neutral White)	102	40,000 hrs.
R	Red (621nm)		
G	Green (525nm)		
B	Blue (470nm)		
A	Amber (590nm)	37	

To calculate Lumens per Foot, multiply Efficacy by Watts per Foot.
Example: 103 Lumens per Watt x 1.5 Watts per Foot = 154 Lumens per Foot.


DELIVERED LUMENS

Wattage	Delivered Lumens (with Light Loss)	
	(SF)	(F)
1.5W	134	115
2.5W	224	192
3.6W	323	277
4.5W	405	347
5.5W	495	424
6.5W	585	501

MOUNTING OPTIONS



Mud-in / Plaster
(Dry / Damp Orientation)



Mud-in / Plaster
(Wet Orientation)

LENS / OPTICS APPEARANCE




50% Semi-Frosted Lens (SF)
Slight Diode Image
12.5% Light Loss




100% Frosted Lens (F)
No Diode Image: Line of Light
25% Light Loss

BEAM ANGLE



120° x 120° Beam


TM-30 VALUES

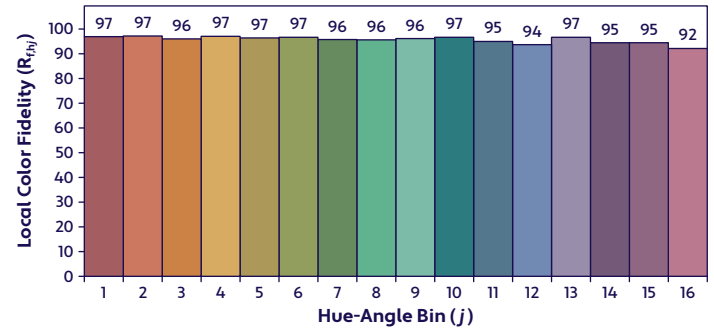

x 0.4085
y 0.3901
u' 0.2381
v' 0.5115

CIE 13.3-1995
(CRI)
R_a 97
R_s 95

SPECTRAL POWER DISTRIBUTION AMBER LED (590nm) TURTLE FRIENDLY

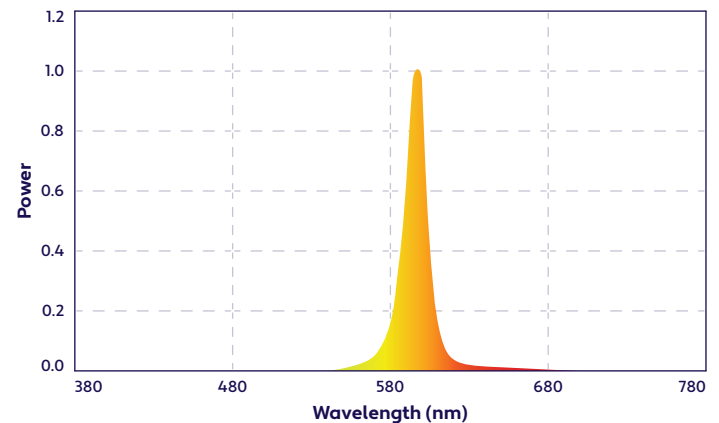


DRIVERS

Dimming Selection	Product Code	Link to Specification Sheet / URL
Phase Dimming: Forward Phase / Reverse Phase	(PH)	
0-10V: 100% - 1%	(10V)	
Hi-Lume 1% 3 Wire	(L3DA)	
Hi-Lume Premier 0.1% JA8	(L3D0)	
JA8 0-10V	(JA8-10V)	
DMX-512	(DMX)	
DALI	(DALI)	

CONNECTORS (Sold Separately)


Note: Connectors are factory assembled to each run length. Connectors are subject to change without notice.

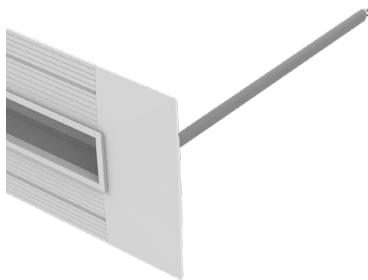

Dry Plenum Rated Power Connector
(20/2 Gauge Wire)
(A8-ZIGY-FWA-PC-PLM-DRY-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIGY-FWA-PC-PLM-DRY-	36"	
A8-ZIGY-FWA-PC-PLM-DRY-		


Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

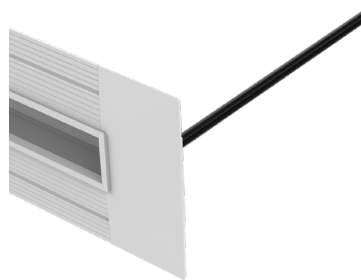

Wet Power Connector
(20/2 Gauge Wire)
(A8-ZIGY-FWA-PC-WET-X)
X = Specify Length, 36" Default, 25' Maximum

Part #	Length	Qty.
A8-ZIGY-FWA-PC-WET-	36"	
A8-ZIGY-FWA-PC-WET-		

Note: Specify 1 Power Connector for each lead required. Power Connectors are factory assembled to each length.

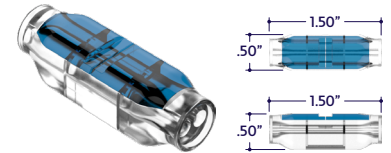

Part #	Qty.
A8-SC-2P-WET	

END CAPS (Sold Separately)



Left End Cap
(A8-ZIGY-FWA-ECL-WH)

Part #	Qty.
A8-ZIGY-FWA-ECL-WH	




Right End Cap
(A8-ZIGY-FWA-ECR-WH)

Part #	Qty.
A8-ZIGY-FWA-ECR-WH	


MITERED CORNERS (Sold Separately)

Note: The corner dimensions shown are not to scale.



90° Internal Corner
(A8-ZIGY-FWA-90D-IN)

Part #	Qty.
A8-ZIGY-FWA-90D-IN	



90° External Corner
(A8-ZIGY-FWA-90D-EX)

Part #	Qty.
A8-ZIGY-FWA-90D-EX	




DESIGN GUIDELINES


Individual Fixture




Individual Fixture with Mud-In

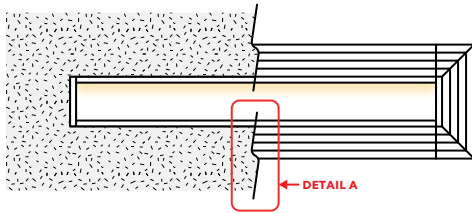


Continuous Run

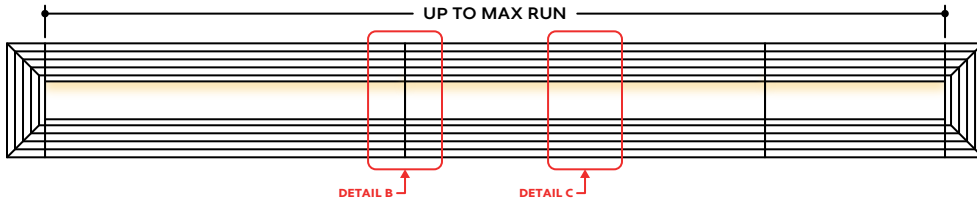

Runs with Continuous Connector (Dry Location)

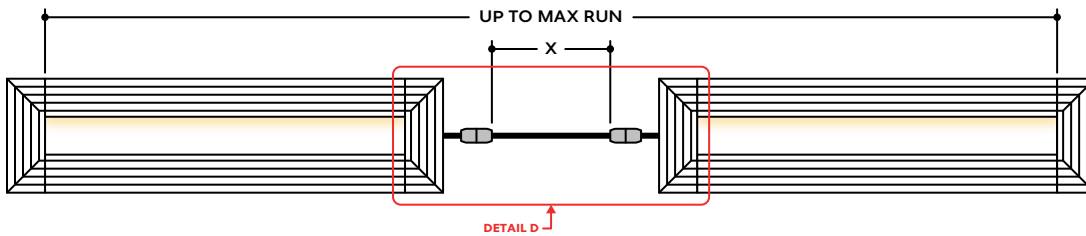

Runs with Continuous Connector (Wet Location)

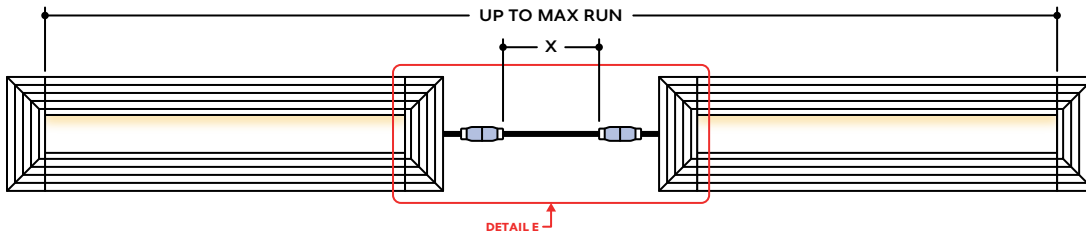

KEY

- Detail A** **Mud-In:** Plaster is used to cover the flanges of the extrusion, leaving a flush appearance. Refer to installation instructions for details.
- Detail B** **Two Extrusions Meet:** Two extrusion segments meet. Refer to installation instructions for additional details.
- Detail C** **Two Lenses Meet:** Lenses are staggered so that the lens always overlaps where two extrusion segments meet. Refer to installation instructions for additional details.
- Detail D** **Dry Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a dry location installation area. For Mud-In applications, the connection is located behind the mounting surface, such as drywall.
- Detail E** **Wet Continuous Connector:** Used to span a corner or traverse a gap, corner, or obstacle in a wet location installation area. For Mud-In applications, the connection is located behind the mounting surface.

Note: Drawings not to scale. Product may differ from examples shown.

620 South Richfield Rd, Placentia, CA 92870

aluz.lighting | info@aluz.lighting | 866.ALUZ.LTG | 714.535.7900

© ALUZ All Rights Reserved. ALUZ reserves the right to make changes or withdraw specifications without prior notice.

Specification Submittal

Page 4 of 4

8 / 19 / 2025 / Rev 10